

AV Receiver RX-A1030



SCENE YPAO) ECOmode

AVENTAGE 7.2-channel Network AV Receiver featuring high-grade audio design with new ESS DAC and Anti-Resonance Technology Wedge. HDMI Zone Switching and other flexible system customisation functions. Other major features include MHL support, AV Controller App support and HDMI with Ultra HD (4K) upscaling.





The RX-A1030 offered with black, titanium and gold finish available in some areas



Oil-Damped Hidden Control Panel Includes HDMI/MHL Input Terminal, USB Port, Video Aux Input Terminals, Zone 2 Switch, YPAO Microphone Jack, And More.



7-channel powerful surround sound
170W per Channel (4 ohms, 1 kHz, 0.9 % THD, 1 ch driven [European Model])
110W per Channel (8 ohms, 20 Hz-20 kHz, 0.06 % THD, 2 ch driven)
165W per Channel (8 ohms, 1 kHz, 10 % THD, 1 ch driven, JEITA)

 +D Audio format decoding: Dolby TrueHD and DTS-HD Master Audio; Dolby Digital Plus and

DTS-HD High Resolution Audio

Symmetrical power amplifier layout
 Heat sink with anti-vibration and anti-thermal properties

· Rigid chassis with additional bottom frames

• ESS ES9006 DAC featuring true professional digital audio quality

DAC on Pure Ground circuitry

• High speed thermal feedback power amplifier

Ultra Low Jitter PLL circuitry helps optimise sound imaging
 Extra 5th foot with Anti-Resonance Technology (A.R.T. Wedge) to reduce vibration

• Detachable Power Cable for easier installation (also allows cable upgrade)

Assignable amplifiers for bi-amp connection

Intelligent assignable amplifiers for Surround Back <-> Front Presence or Zone 2

· Phono input for vinyl playback

• FLAC or WAV 192kHz/24-bit audio playback

Video Features

• Ultra HD (4K) Pass-Through for next-generation super high resolution images

• Ultra HD (4K) upscaling boosts lower resolution images to super high-definition resolution

Ultra HD (4K) / full HD 1080p video upscaling from analogue and HDMI input

. HDMI: 8 inputs (1 on front) and 2 outputs (assignable for zone) with 3D and Audio Return Channel

High quality video processing with precise deinterlacing
 Motion adaptive and edge adaptive deinterlacing

- Multi-cadence (incl. 3-2 pull-down) detection

Advanced Features

- · SCENE PLUS simple and versatile functionality
- HDMI CEC powers up compatible TVs and Blu-ray Disc™ players
- 12 SCENE choices (4 on front panel and others on GUI)
 Zone SCENE 4 SCENE buttons for Zone 2
- Versatile parameters can be stored into each SCENE
- Network functions
- AirPlay allows music streaming from Mac, PC, iPod, iPhone, iPad
 AV Controller app for operating various functions from an iPod, iPhone, iPad or Android phones/tablets
 Access to: Internet Radio (vTuner): MP3, WMA
- Streaming Services (Napster®*, Pandora® internet radio*)
 - Music service availability varies by Music files on PC/NAS: WAV, MP3, WMA, AAC, FLAC
- Web Browser Control via PC or Tablet
 DLNA 1.5 certified

- MHL supports full HD video and audio from mobile phones and portable devices
- HDMI front panel input for devices such as camcorders and digital cameras • Front panel USB Digital Connection for iPod, iPhone, iPad and USB device
- iPod/iPhone/iPad song titles displayed in English and Western European languages on the front panel and on-screen display
- HDMLCEC with versatile control from AV Receiver remote control
- Ability to change HDMI input while in Standby Through mode
- YPAO R.S.C. (Reflected Sound Control) sound optimisation with multi-point measurement
- Ability to store and choose between two speaker setting patterns
 Advanced multi-language GUI on-screen display with album art (English, German, French, Spanish, Russian, Italian, Japanese and Chinese)
- Flexibly assignable component video and optical/coaxial (except Video Aux) inputs allow a wide range of source components
- Learning-capable and preset remote unit (Preset remote unit in some areas)
- Background Video feature (for tuner and network sources)
- · DC Out for optional accessories

Surround Realism

- HD Audio decoding with CINEMA DSP 3D (17 DSP programmes)
- · Compressed Music Enhancer with CINEMA DSP
- Dialogue Lift ensures that dialogue comes from the centre of the screen
- Virtual dialogue lift even without use of presence speakers
- Dialogue Level Adjustment for proper sound balance with dialogue and vocals
 Virtual Presence Speaker function for CINEMA DSP 3D surround without Front Presence Speakers
- Adaptive DRC (Dynamic Range Control) and Adaptive DSP Level
- SILENT CINEMA and New Virtual CINEMA DSP for 7.1-channel surround sound
- Two subwoofer outputs (simultaneous outputs)

Versatile Zone Control

- HDMI Zone Switching allows the same or different HD audio/video sources to be enjoyed in two rooms
- Zone 2 on/off and control on front panel
- Zone 2 video assign (Component, S-Video, Composite)
- System Backup / Recovery function
- · Zone mono, Zone volume, tone controls and balance

Eco-Friendly Design

- ECO mode operation for about 20%* less power consumption *Compared to power consumption when ECO mode is off (Yamaha measurement).

 • Auto power standby function with variable time setting
- . Low standby power consumption of 0.35 W



AV Receiver RX-A1030

Superlative Audio Quality

The RX-A1030 delivers the kind of superb audio quality you expect from a high-end Yamaha receiver. It incorporates the ES9006 Premier Audio DAC from ESS Technology, a solution with exceptionally good S/N ratio and dynamic range that provides true professional

digital audio quality. The RX-A1030 also uses Ultra-Low Jitter PLL circuitry, which prevents the type of digital distortion known as iitter from affecting the sound quality.



Network Functions Give You More Control, Greater Access

AirPlay lets you stream music wirelessly from a Mac, PC, iPod, iPhone or iPad. You can also access streaming services from a PC or NAS. Compatibility with FLAC/WAV 192kHz provides best sound quality. And the AV Controller app offers convenient operation from a smartphone or tablet.



HDMI Zone Switching and MHL Support

HDMI Zone Switching enables people to enjoy not just one HD audio/video source but two different ones in two different zones. MHL (Mobile High-Definition Link) allows the connection of MHL-compatible mobile phones for enjoying stored content at up to 1080p video quality and with 7.1-channel sound, while charging power to the mobile phone. ***MHL**






Audio Section	
Rated Output Power (4 ohms, 1 kHz, 0.9 % THD, 1 ch driven [European Model])	
Front L/R	170 W + 170 W
Rated Output Power (8 ohms, 20 Hz-20 kHz, 0.06 % THD, 2 ch driven)	
Front L/R	110 W + 110 W
Centre	110 W
Surround L/R	110 W + 110 W
Surround Back L/R	110 W + 110 W
Maximum Effective Output Power (8 ohms, 1 kHz, 10 % THD, 1 ch driven, JEITA)	
Front L/R	165 W + 165 W
Centre	165 W
Surround L/R	165 W + 165 W
Surround Back L/R	165 W + 165 W

Dynamic Power/Ch (Front L/R, 8/6/4/2 ohms)	135/165/210/280 W
General	
Standby Power Consumption	
HDMI Control off, Standby Through off	0.35 W (typical)
HDMI Control on, Standby Through on	4.5 W (typical)
Network Standby on	2.2 W (typical)
	435 x 182 x 432 mm
Dimensions (W x H x D)	17-1/8" x 7-1/8" x 17"
Weight	15.1 kg; 33.3 lbs.

Optional Accessories



WiFi Adapter for Wireless Streaming of Additional Music Sources






Bluetooth Adapter for Wireless Music Streaming





With the YBA-11, you'll be able to stream music wirelessly from a Bluetooth capable mobile phone or a PC to the AV receiver. Thanks to the digital connection and aptX® audio coding algorithm, you'll enjoy wireless music streaming with optimum sound quality.

* Accessory availability varies depending on area

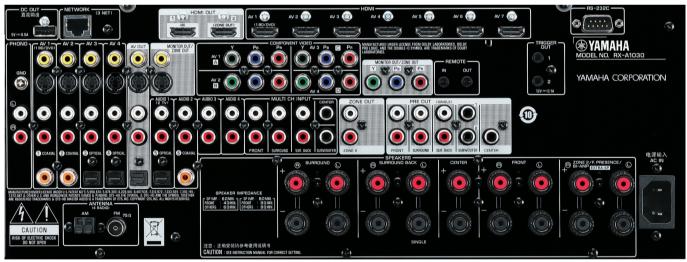

European Model **Extensive Connections**

Inputs	
HDMI*1 (Audio Input Assignable*2, Front HDMI : MHL input compatible)	8
Network	1
USB*1	1
Radio Antenna (FM/AM)*3	1 / 1
Optical Digital (Assignable except Video AUX)*1	4
Coaxial Digital (Assignable)	3
Analogue AV*1 / Audio (with Phono)	5/5
Component Video (Assignable)	4
Composite*1 / S-Video	5 / 4
Multi-Channel Input	8ch

Outputs	
HDMI	2 (Zone assignable)
Optical Digital	1
Analogue Audio	1
Pre Out	7.2ch
Component Video Monitor*4	1
Composite / S-Video Monitor*4	1 / 1
AV Out (Composite / S-Video)	1 / 1
Speaker*5	7ch (9 terminals)
Subwoofer	2 x mono
DC Out*6	1
Headphone Jack	1

Others	
Zone 2 Out with Volume and Tone Controls	1
Remote In/Out	1 / 1
+12V / Total 100 mA Trigger Out*7	2
RS-232C	1
Terminal for Detachable Power Cable	1

- Including front panel terminals.
 Front HDMI input is not assignable.
 The shape of the FM antenna terminal varies according to area.
 Assignable to monitor out or Zone 2 out.
 Banana-plug compatible speaker terminals are available in some areas.
 For optional accessories.
 Yamaha subwoofer system control support.

- "Made for iPod," "Made for iPhone," and "Made for iPad" mean that an electronic accessory has been designed to connect specifically to iPod, iPhone, or iPad, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPod, iPhone, or iPad may affect wireless performance. AirPlay, iPhone, iPod, iPod classic, iPod nano, iPod touch, and iTunes are trademarks of Apple Inc. AirPlay works with iPhone, iPad, and iPod touch with IOS 4.33 or later, Mae with OS X Mountain Lion, and Mae and PC with iTunes 10.22 or later. The Bluetootiff worm drank and logos are registered to the trademarks of the trademarks of the trademarks of their respective commens. The application of the appl